

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 15 TOWNSHIP 15 RANGE 5

DATE: 8-03-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison @ surface

METHOD OF ESTABLISHMENT: County: 7-30-98



IN. S.P.C. E ZONE NAD '83

NAME: 15051504

N: 499583.8860(m)

E: 73934.1530(m)

Prospect St. 1100 S

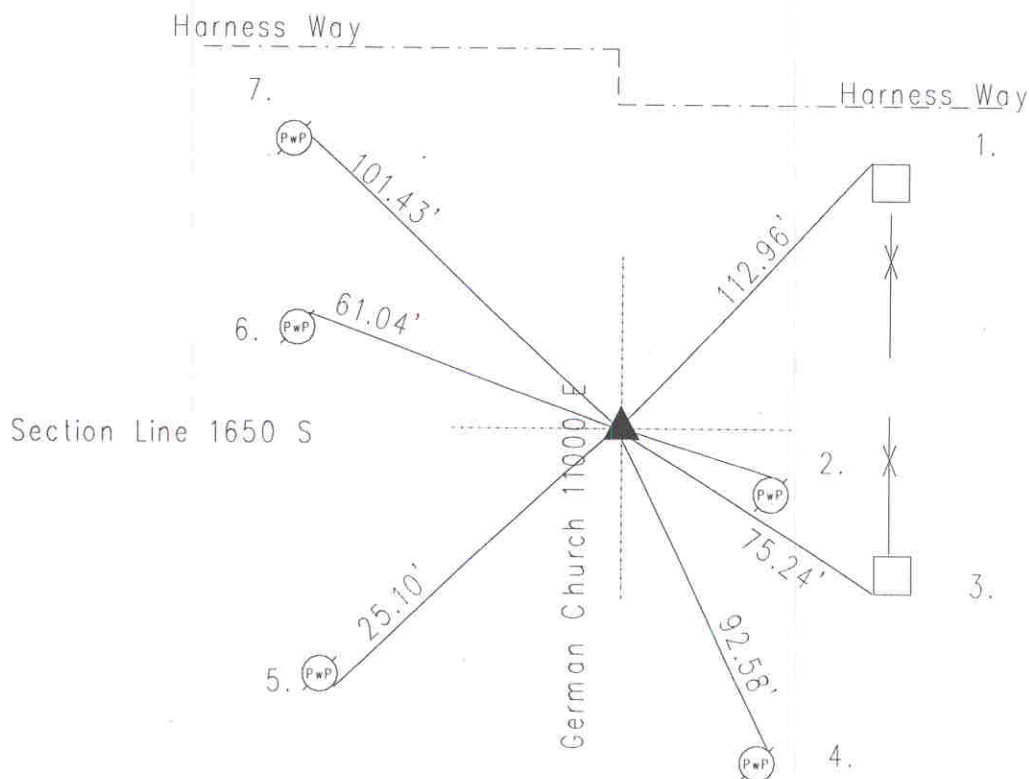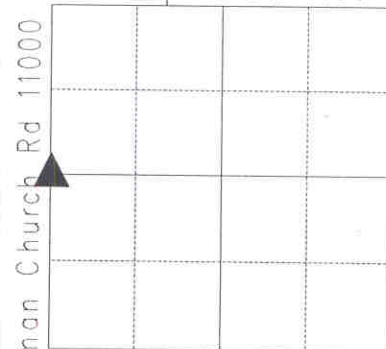

Corner set 9-7-1852 by Hosbrook at position. 8-12-63 Monroe re-tied corner and called stone above surface. 2-4-69 McLand re-tied called same. 1-24-75 Fortner dug and found PK nail st surface 1.55'E of C/L fence line going W stone 12" down. 7-24-89 Wilcoxon excavated corner and set Harrison.

Re-tied 7-30-98 by Wilcoxon. Re-tied 8-03-03 by Wilcoxon.

15051504

REF.	DISTANCE	DESCRIPTION
1.	112.96'	NW corner of brick colum 12" up
2.	61.36'	PK nail w/brass washer N PwP#184-621 F
3.	75.24'	SW corner of brick column
4.	92.58'	Mag nail w/brass washer NE Siren pole 12"up
5.	25.10'	PK nail w/brass washer S PwP#58-621D 8"up
6.	61.04'	PK nail w/brass washer NE PwP#210-621 D 8"up
7.	101.43'	PK nail w/brass washer E pwP#209-621 D 10"up